

Construction Air Tools



Construction Air Tools



TPB-90



TPB-60



TPB-40



TPB-30

	TPB-90	TPB-60	TPB-40	TPB-30
Shank Size	1-1/8" x 6" 1-1/4" x 6"	1-1/8" x 6" 1-1/4" x 6"	1" x 4-1/4"	7/8" x 3-1/4" 1" x 4-1/4"
Piston Stroke	6" (152 mm)	4" (100 mm)	5-3/4" (146 mm)	3-11/32" (85 mm)
Piston Diameter	2-5/8" (66.67 mm)	2-1/4" (57.15 mm)	1-3/4" (44 mm)	1-3/4" (44.45 mm)
Impact Rate	1,250 BPM	1,400 BPM	1,100 BPM	1,550 BPM
Weight	92.4 lbs (42 kg)	66 lbs (30 kg)	39.6 lbs (18 kg)	33 lbs (15 kg)
Overall Length	28-1/2" (723 mm)	25-3/8" (645 mm)	26" (660 mm)	22-1/4" (564 mm)
Air Consumption	77 CFM	70 CFM	56 CFM	49 CFM
Air Inlet Thread	3/4" NPT	3/4" NPT	1/2" NPT	3/8" NPT
Hose Size	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)



TRC-30




TCD-30



TCD-20

	TRC-30	TCD-30	TCD-20
Shank Size	7/8" x 3-1/4" 1" x 4-1/4"	7/8" x 3-1/4" 1" x 4-1/4"	7/8" x 3-1/4"
Piston Stroke	3-11/32" (85 mm)	3-11/32" (85 mm)	2-3/8" (60 mm)
Piston Diameter	1-3/4" (44.45 mm)	1-3/4" (44.45 mm)	1-11/16" (42.85 mm)
Impact Rate	1,550 BPM	1,550 BPM	2000BPM
Weight	36 lbs (16.3 kg)	30 lbs (13.6 kg)	22 lbs (10 kg)
Overall Length	22-1/4" (564 mm)	22-1/4" (564 mm)	26" (660 mm)
Air Consumption	49 CFM	49 CFM	38CFM
Air Inlet Thread	3/8" NPT	3/8" NPT	1/2" NPT
Hose Size	3/4" (19mm)	3/4" (19mm)	3/4" (19mm)


Construction Air Tools

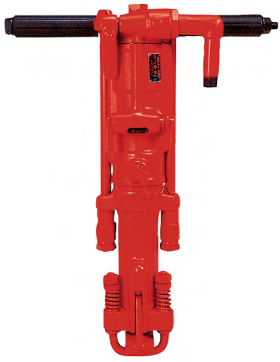


TS-55



TJ-20

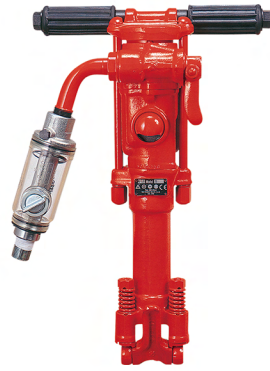

TJ-15



THD-1100N

	TS-55	TJ-20	TJ-15	THD-1100N
Shank Size	7/8" x 3-1/4" 7/8" x 4-1/4" 1" x 4-1/4"	7/8" x 3-1/4" 7/8" x 4-1/4"	7/8" x 3-1/4" 7/8" x 4-1/4"	7/8" x 3-1/4"
Piston Stroke	2-9/16" (65 mm)	1-15/16" (49 mm)	1-3/4" (45 mm)	1-7/32" (31 mm)
Piston Diameter	2-5/8" (66.6 mm)	2-11/16" (68 mm)	2-1/8" (54 mm)	1-1/2" (38 mm)
Impact Rate	1,800 BPM	2,400 BPM	2,450 BPM	3,200 BPM
Speed	200 RPM	200 RPM	250 RPM	350 RPM
Weight	59.4 lbs (27 kg)	40.7 lbs (18.5kg)	30.8lbs (14 kg)	11.4 lbs (5.2 kg)
Overall Length	22-3/8" (568 mm)	24-1/32" (610 mm)	18-1/2" (468 mm)	16-17/32" (420 mm)
Air Consumption	91.81 CFM	87.5 CFM	56 CFM	28.3 CFM
Air Inlet Thread	3/4" NPT	3/4" NPT	3/4" NPT	3/8" NPT
Hose Size	3/4" (19 mm)	3/4" (19 mm)	3/4" (19 mm)	1/2" (12.7 mm)



B-90



B-110



T-6


	B-90	B-110	T-6
Shank Size	1-1/8" Shank	1-1/8" Shank	N/A
Piston Stroke	8-15/16" (227 mm)	11-15/16" (303 mm)	5-1/2" (140 mm)
Piston Diameter	1-3/16" (30.2 mm)	1-3/16" (30.2 mm)	1-1/2" (38 mm)
Impact Rate	700 BPM	680 BPM	750 BPM
Weight	32 lbs (14.3 kg)	35 lbs (14.6 kg)	39.6 lbs (18 kg)
Overall Length	22-29/32" (582 mm)	26" (660 mm)	49" (1240 mm)
Air Consumption	36 CFM	32.9 CFM	35.2 CFM
Air Inlet Thread	3/8" NPT	3/8" NPT	1/2" NPT
Hose Size	1/2" (12.7mm)	1/2" (12.7mm)	1/2" (19mm)




AA-OS



TCH-2

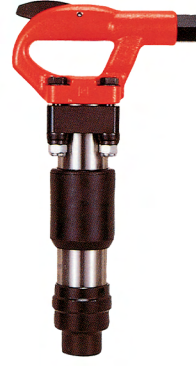

TCH-3

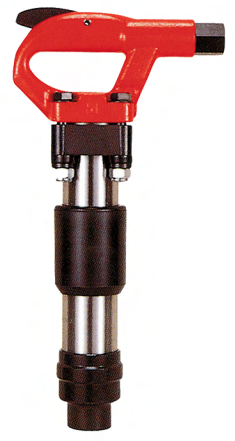

TCH-4

	AA-OS	TCH-2	TCH-3	TCH-4
Shank Size	.680 Round Shank or .580 Hex Shank with Round or Oval Collar			
Piston Stroke	1-13/16" (45 mm)	2" (50.8 mm)	2-1/2" (63.5 mm)	4" (101.6 mm)
Piston Diameter	7/8" (22.2 mm)	1-1/8" (28.54 mm)	1-1/8" (28.54 mm)	1-1/8" (28.5 mm)
Impact Rate	3,000 - 3,200 BPM	2,600 - 2,800 BPM	2,000 - 2,200 BPM	1,600 - 1,800 BPM
Weight	7.9 lbs (3.6 kg)	18 lbs (8.1 kg)	19 lbs (8.55 kg)	20 lbs (9 kg)
Overall Length	12-3/4" (374.6 mm)	14-3/4" (374.65 mm)	16" (406.4 mm)	17" (431.8 mm)
Air Consumption	22.95 CFM	29.75 CFM	31.5 CFM	33.25 CFM
Air Inlet Thread	3/8" NPT	7/8" x 24 Thrds /NPT	7/8" x 24 Thrds /NPT	7/8" x 24 Thrds /NPT
Hose Size	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)



THA-1B



THA-2B



THA-3B



THA-4B

	THA-1B	THA-2B	THA-3B	THA-4B
Shank Size	.680 Round Shank or .580 Hex Shank with Round or Oval Collar			
Piston Stroke	1" (25.4 mm)	2-3/32" (51 mm)	2-17/32" (64 mm)	4-1/32" (102 mm)
Piston Diameter	1-1/8" (28.54 mm)	1-1/8" (28.54 mm)	1-1/8" (28.54 mm)	1-1/8" (28.54 mm)
Impact Rate	2,500 BPM	2,300 BPM	2,200 BPM	1,800 BPM
Weight	14.8 lbs (5.9 kg)	15.8 lbs (6.2 kg)	16.5 lbs (6.8 kg)	18.25lbs (7 kg)
Overall Length	15-9/32" (388 mm)	16-1/4" (413 mm)	17-23/32" (450 mm)	18-29/32" (480mm)
Air Consumption	28 CFM	29.75 CFM	31.8 CFM	33.25 CFM
Air Inlet Thread	3/8" NPT	3/8" NPT	3/8" NPT	3/8" NPT
Hose Size	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)	1/2" (12.7 mm)

Corporate Office

3900 Ben Hur Ave Ste 3
 Willoughby, OH 44094
 (440) 954-9923

West Coast Office

6592 Box Springs Blvd
 Riverside, CA 92507
 (951) 681-09089